


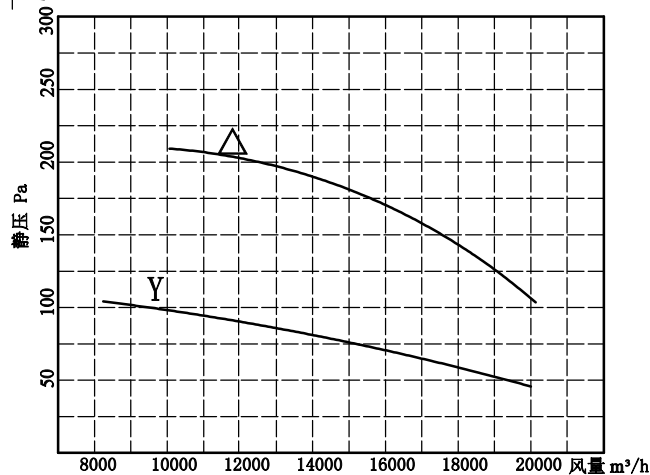


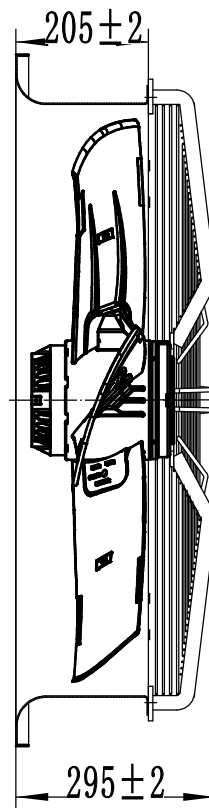

LABEL (铭牌):

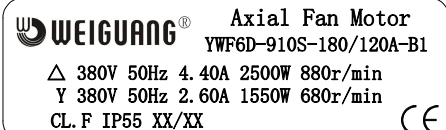

WIRING DIAGRAM (接线图) :

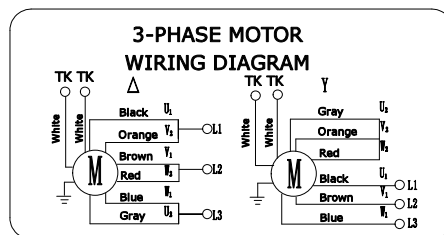

SPECIFICATION 规格说明
HANGZHOU WEIGUANG ELECTRONIC CO.,LTD.

UNIT 类型	Axial fan motor 外转子轴流风机
MOTOR 电机型式	Three phases motor
MOTOR TYPE 电机型号	YWF6D-910S-180/120A-B1
VOLTAGE 额定电压 (V)	380
FREQUENCY 频率 (Hz)	50
INPUT POWER 输入功率 (W)	△/Y 2500/1550
CURRENT 电流 (A)	△/Y 4.40/2.60
SPEED 转速 (r/min)	△/Y 880/680
AIR FLOW 风量 (m³/h)	△/Y 20000(①130Pa)/20000(④40Pa)
NOISE 噪音 (dBA)	△/Y 75/72
ROTATION 旋转方向	顺时针，从转子方向看
INSULATION CLASS 绝缘等级	F
MOTOR PROTECTION 电机保护	Thermocontact 150±5℃ 热保护器
TEMPERATURE RISE 温升	<75K
PROTECTION CLASS 防护等级	IP55
OPERATING TYPE 工作定额	S1 连续工作制
AMBIENT TEMPERATURE 适用环境温度	-40℃ +60℃
BEARINGS 轴承型式	Ball bearings 滚珠轴承
MOUNTING TYPE 安装方式	Horizontal or Vertical 垂直或水平安装
ELECTRICAL CONNECTION 电源线	Lead wire 1330UL 9G 1.31mm² ,Length 100mm in terminal box connected 接线盒（9芯1.31mm² 线长100mm）
APPROVALS 认证标记	CE
NET WEIGHT/GROSS WEIGHT净重/毛重	40/55kg
PACKING 包装	110*110*32cm

							SIGN	DATE	TITLE	
						DRN. BY			YWF6D-910S-180/120A-B1	
						CHD. BY			PROJECTION	
						ENG. BY				
REV.	DESCRIPTION	APPROVED	DATE			APP. BY			A4 SCALE SHEET: of	